


"POLE BACKFILL TYPICAL DETAIL"

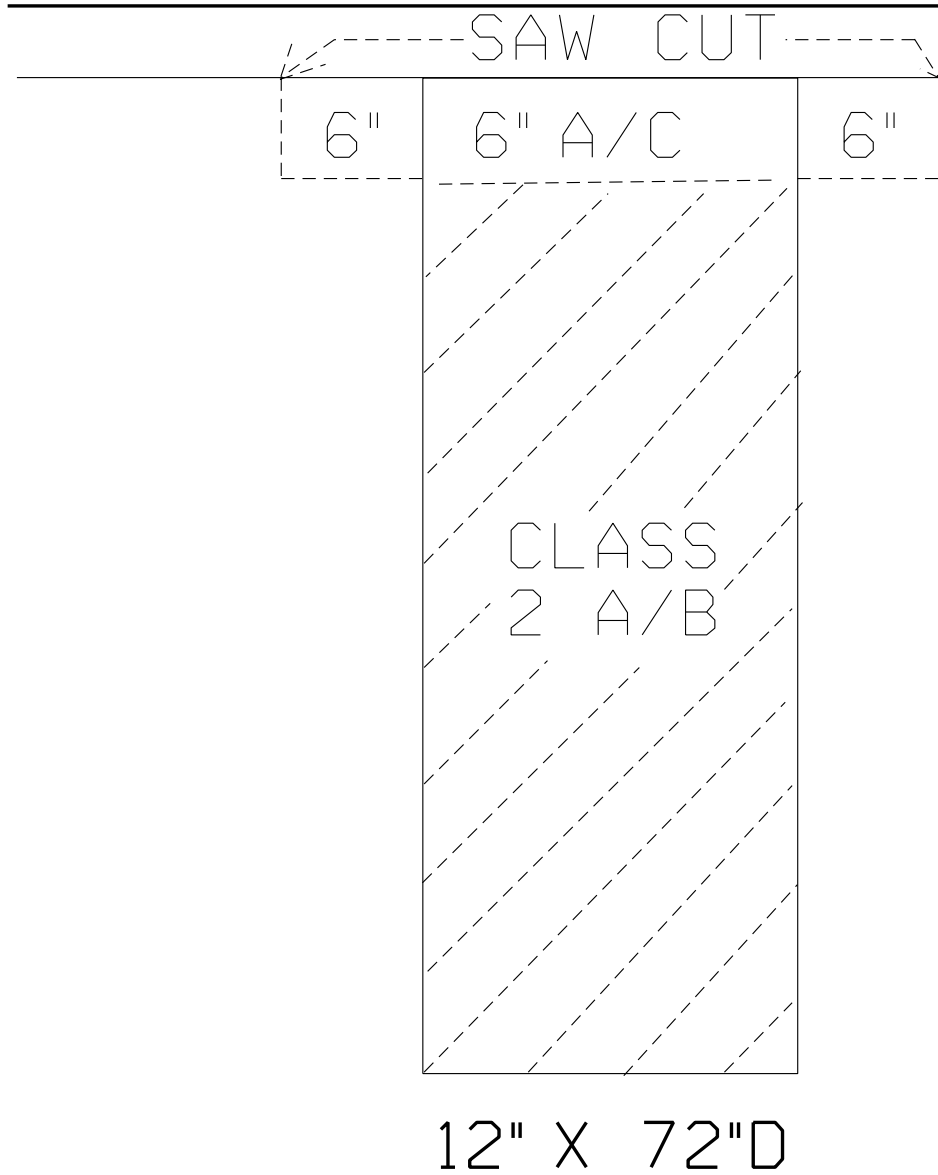

FINISH GRADE—
46L TO BACKFILL OLD OLD POLES

SIDEWALK AND DRIVEWAYS:

RESTORE ON AVERAGE TWO (2) FLAGS OF SIDEWALK PER POLE OR ANCHOR BEING REMOVED. BACK FILL WITH CLASS 2 AGGREGATE BASE ROCK, PER CITY, COUNTY, OR CAL TRANS STANDARDS. COMPACT AT 95%.

STREET:

MAKE T-SECTION CUT TO REMOVE OLD ASPHALT, 6" AROUND THE POLE. BACK FILL WITH CLASS 2 AGGREGATE BASE ROCK, PER CITY, COUNTY, OR CAL TRANS STANDARDS. COMPACT AT 95%.

DIRT:

BACK FILL WITH NATIVE FILL, PER CITY, COUNTY, OR CAL TRAN'S STANDARDS. RESTORE LAWN AREAS AS REQUIRED. COMPACT AT 95%.