


Etched polypropylene face
Face anchored in concrete
Ultra-violet inhibitor
Exceeds ASTM-D1693 Standards
for Environmental Stress Cracking Resistance



A high density reinforced concrete box with non-settling shoulders positioned to maintain grade and facilitate back filling. Approximate dimensions and weight shown.

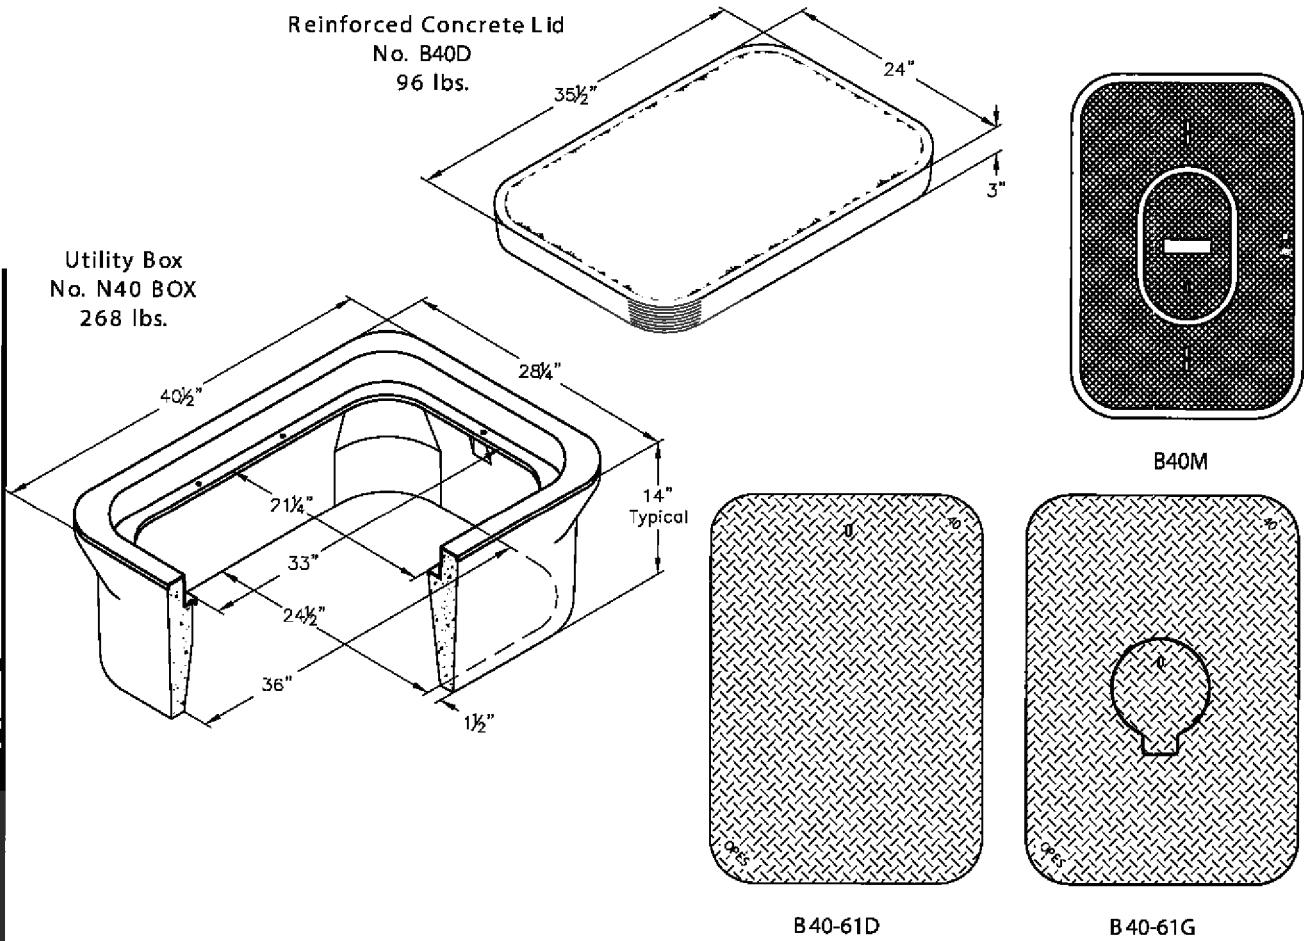

N40 UTILITY BOX
24-1/2" x 36"